


CAT.6 90° Keystone Jack

N-4026

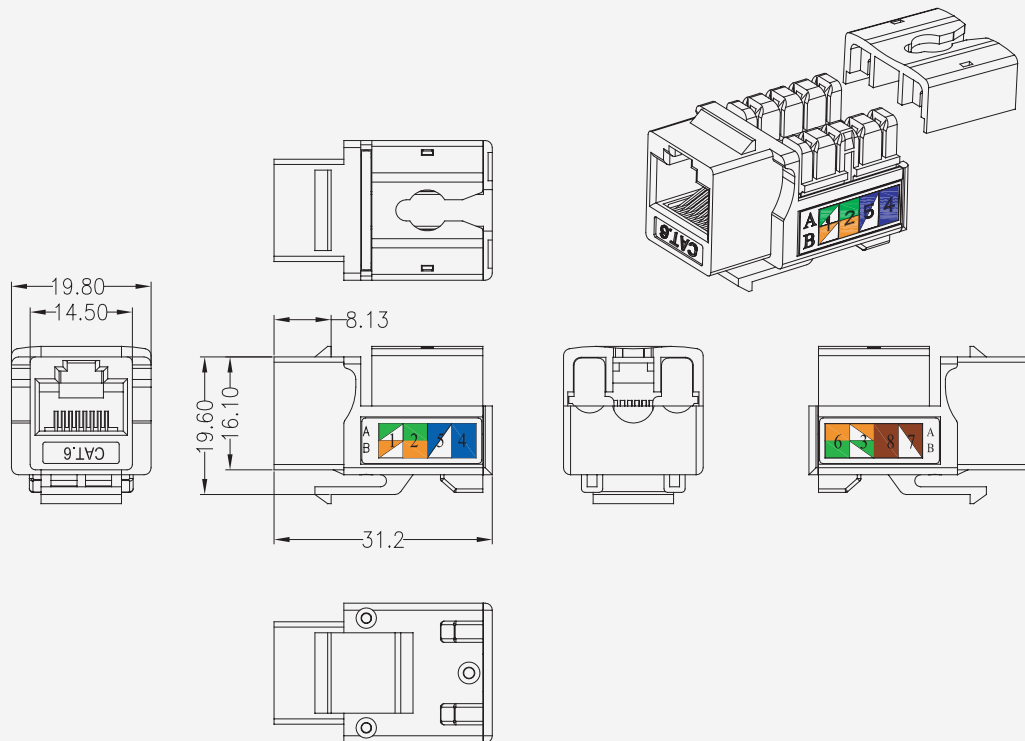

NOTES:

ELECTRICAL:

1.VOLTAGE RATING	: 125 VAC RMS
2.CURRENT RATING	: 1.5 AMP
3.CONTACT RESISTANCE	: 100 MILLIOHMS MAX
4.INSULATION RESISTANCE	: 1000 MEGOHMS MIN @ 500 VDC
5.DIELECTRIC STRENGTH	: 750 VAC RMS 60Hz,1MIN
6.C6 PERMANENT LINK	: CONFORM TO ANSI/TIA/EIA-568 B.2-1

ENVIRONMENTAL:

1.STORAGE	: -40° TO +85°
2.OPERATION	: 0° TO 70°

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68,SUBPART F.

MECHANICAL:

1.HOUSING MATERIAL	: PC UL94V-0
2. INSERT MATERIAL	: FLAME RETARDANCY ABS UL94V-0
3. PCB MATERIAL	: FR-4 THICKNESS:1.6mm
4. CONTACT MATERIAL	: PHOSPHOR BRONZE STAMP PIN T=0.35mm
5. IDC CONTACT MATERIAL	: PHOSPHOR BRONZE T=0.50mm WITH NICKEL PLATING
6. WIRE	: AWG 24~26

PART NUMBER:SL6KJU0061102