


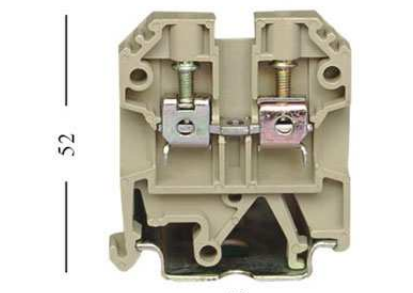
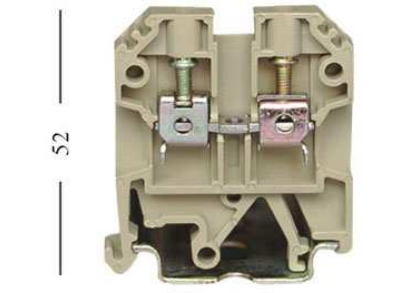
General




SAK series combined terminal blocks mainly use Germany Woodmeler's connection technology, and designed and made at home. Technology targets conforms to the standard or IEC 60947-1, IEC 60947-7-1, GB14048.1. However, JXB is only for mounting on , increase the high current terminal series.



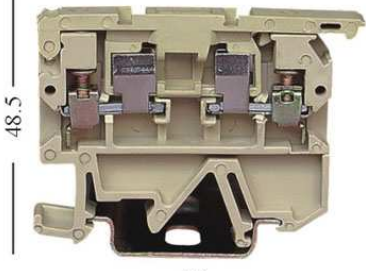
Characteristics


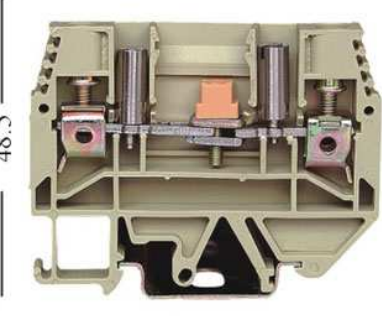
- 1、 Reasonable installing design, strong versatility, SAK type can be mounted on the guide of Grand TH type.
- 2、 small volume, full specification, series SAK's big current terminal use reinforced accessories to install steel pressing-wire frame and wire diversion board technology in order to guaranjtee the contact reliable.
- 3、 the stand uses creamed-yellow and grey color, the connecting-ground pedestal uses yellow and green color with moore modern sense.

Specific Item Details

 <p>通用型universal type 厚度thickness:6</p>	 <p>通用型universal type 厚度thickness:8</p>	 <p>通用型universal type 厚度thickness:8</p>
<p>Part Number : SAK2.5EN</p>	<p>Part Number : SAK4EN</p>	<p>Part Number : SAK6EN</p>
<p>Voltage / Current : 800V / 24A</p>	<p>Voltage / Current : 800V / 32A</p>	<p>Voltage / Current : 800V / 41A</p>
<p>Wire Size : 0.2—2.5mm²</p>	<p>Wire Size : 0.2—4.0mm²</p>	<p>Wire Size : 0.2—6.0mm²</p>

 <p>通用型universal type 厚度thickness:10</p>	 <p>通用型universal type 厚度thickness:12</p>	 <p>通用型universal type 厚度thickness:14.5</p>
<p>Part Number : SAK10EN</p>	<p>Part Number : SAK16EN</p>	<p>Part Number : SAK25EN</p>
<p>Voltage / Current : 800V / 57A</p>	<p>Voltage / Current : 800V / 76A</p>	<p>Voltage / Current : 800V / 100A</p>
<p>Wire Size : 0.2—10mm²</p>	<p>Wire Size : 0.5—16mm²</p>	<p>Wire Size : 0.5—16mm²</p>

 <p>通用型universal type 厚度thickness:18</p>	 <p>通用型universal type 厚度thickness:22</p>	 <p>保险丝型 fuse type 厚度thickness:6</p>
<p>Part Number : SAK35EN</p>	<p>Part Number : SAK70EN</p>	<p>Part Number : AK-RD-4EN</p>
<p>Voltage / Current : 800V / 125A</p>	<p>Voltage / Current : 800V / 192A</p>	<p>Voltage / Current : 500V / 6.3A</p>
<p>Wire Size : 10—35mm²</p>	<p>Wire Size : 25—70mm²</p>	<p>Wire Size : 0.2-4.0mm²</p>

 <p>双层型double level type 厚度thickness:6</p>	 <p>试验型test type 厚度thickness:8</p>	
<p>Part Number : SAK-4Q</p>	<p>Part Number : SAK-WTK-4EN</p>	
<p>Voltage / Current : 500V / 32A</p>	<p>Voltage / Current : 400V / 41A</p>	
<p>Wire Size : 0.2—4.0mm²</p>	<p>Wire Size : 0.2—4.0mm²</p>	